


## F-100

Model/Item	Output (kg)	Stroke (mm)	Cylinder Dia. (mm)	Stroke Adj. (mm)	Air Consumption (l)	Piping Bore (PT)	Open Height (mm)	Weight (kg)
F100-60	65	50	50	30	1.2	1/4"	150	20
F100-100	120	50	63	30	2	3/8"	150	20.3

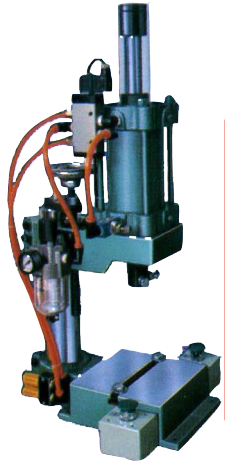

## F-101(A)(B)(C)

Model/Item	Output (kg)	Stroke (mm)	Cylinder Dia. (mm)	Stroke Adj. (mm)	Air Consumption (l)	Piping Bore (PT)	Open Height (mm)	Weight (kg)
F101A-100	120	100	63	30	4	3/8"	200	39
F101A-200	200	100	80	30	6	3/8"	200	43
F101A-300	300	100	100	30	10	3/8"	200	47

Model/Item	Output (kg)	Stroke (mm)	Cylinder Dia. (mm)	Stroke Adj. (mm)	Air Consumption (l)	Piping Bore (PT)	Open Height (mm)	Weight (kg)
F101B-100	120	100	63	30	4	3/8"	270	28.1
F101B-200	200	100	80	30	6	3/8"	270	32.1
F101B-300	300	100	100	30	10	3/8"	270	36.1

Model/Item	Output (kg)	Stroke (mm)	Cylinder Dia. (mm)	Stroke Adj. (mm)	Air Consumption (l)	Piping Bore (PT)	Open Height (mm)	Weight (kg)
F101C-100	120	100	63	30	4	3/8"	270	28.9
F101C-200	200	100	80	30	6	3/8"	270	32.9
F101C-300	300	100	100	30	10	3/8"	270	36.9