

KINWA


CL-260Ax600-2000

CNC LATHE



CL-38x1500-4000

Universal CNC LATHE

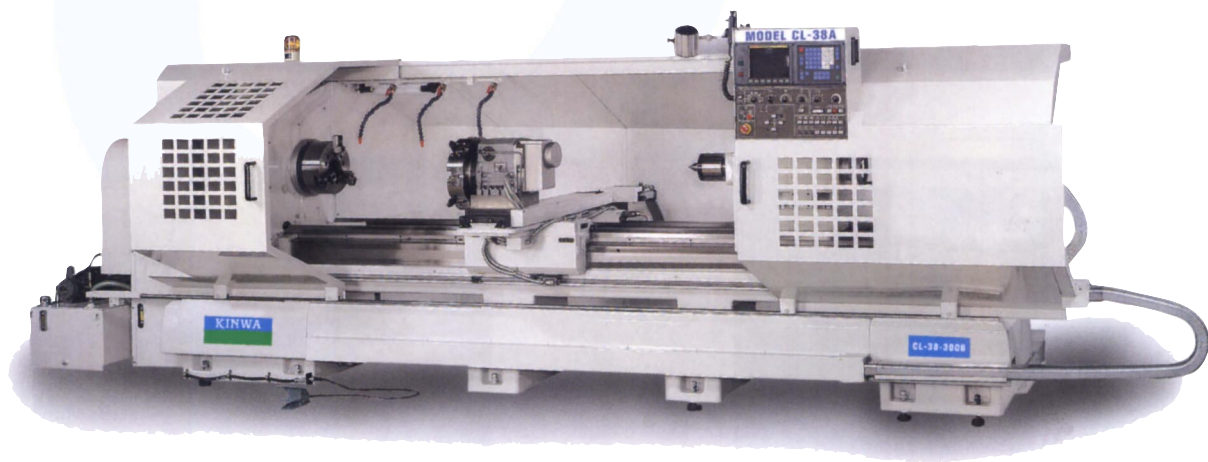

SPECIFICATIONS:

Item		CL-260A x 600~2000	CL-38x 1000~4000
Capacity	Swing bed	570mm	660mm
	Swing over carriage	390mm	370mm
	Max. turning diameter	380mm	600mm
	Width of bed		435mm
	Max. workpiece length	530,1030,2030mm	1000-4000
	Distance between centers	650,1130,2130mm	1000,1500,2000,2500,3000,4000mm
Stroke	X axis	240mm	460mm (OPT 540mm)
	Z axis	610,1090,2090mm	1000,1524,2032,2540,3048,4064mm
Spindle	Speed	35~3000,2000rpm	6~2000rpm (B-type:3~1000rpm)
	Number of speed ranges		2 gears
	Spindle nose	A2-8, A2-11	A2-11
	Spindle bearing ID	120mm	160mm (B-type:228.6mm)
	Spindle bore	87mm	120mm (B-type:168mm)
	Bar capacity	77mm	
Turret	Turrent type	10,12 8,10 V12	H4,H6,V8 choose one
	OD tool shank	Square 25	H4:32mm,V8:25mm
	ID tool shank (Max.)	Round 40mm	H4&H6:50mm, V8:40mm
Feed traverse	X axis	12m/min	10m/min
	Z axis	15m/min	10m/min
Tailstock	Quill diameter	100mm	100mm
	Quill taper	MT#5	MT#5
	Quill stroke	100mm	200mm
Motor	Main motor (30 min.)	30HP\22.5 kw	30HP\22.5kw
	Servo motor	2.5HP\2.1kw	
	Hydraulic unit motor	2HP\1.5kw	3HP\2.25kw
	Coolant pump motor	0.59HP\0.44kw	2HP\1.5kw
Machine dimension	Height	1940mm	1960mm
	Floor space	4000,4500,5500 x2000mm	4500,5000,5540, 6050,6550,7570 x2970mm
	Weight	5500,7500,11500kgs	5700,6200,7200, 7600,8100,9000 kgs