




PRECISION PREESES SHEARING MACHINE

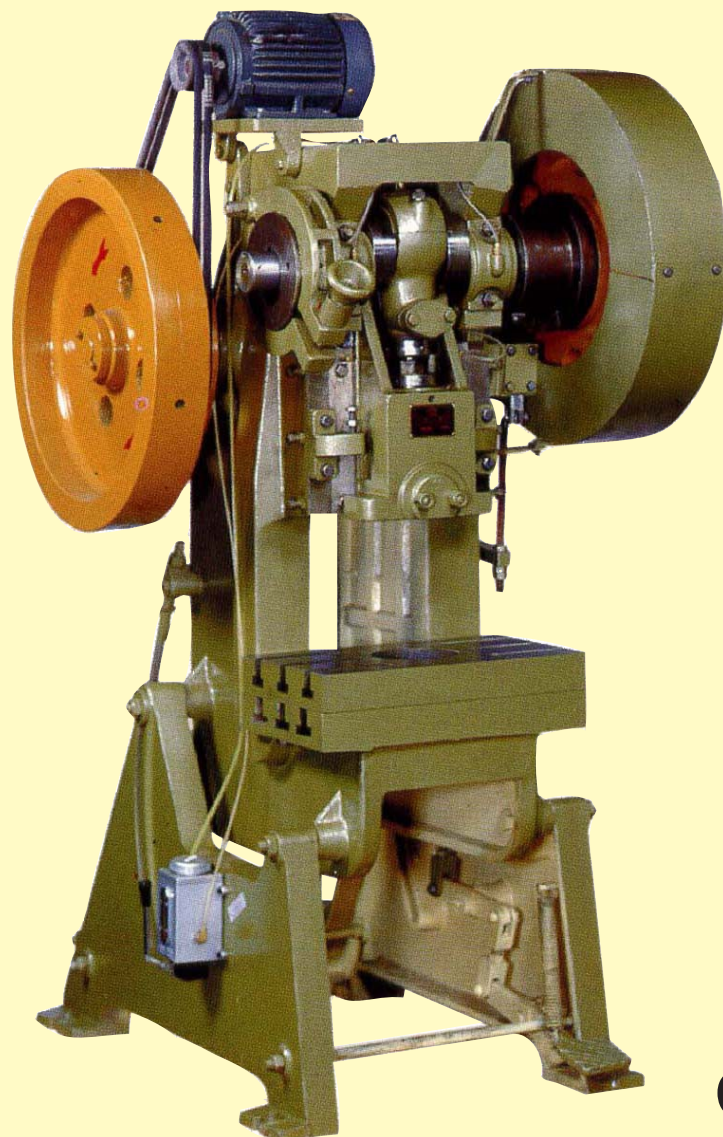

CGPC-20

**Combittech**

Taiwan Combittech Co., Ltd
160 Huel-Chung Road Taichung 407 Taiwan

Tel: +886 4-2311 2413 Fax: +886 4-2311 2415
<http://www.combittech.com.tw>
e-mail: info@combittech.com.tw



Pin Clutch Type		CWPC-08	CGPC-15 CWPC-15	CGPC-20 CWPC-20	CGPS-25	CGPS-30	CGPS-40	CGPS-50	CGPS-80	CGPS-100	CGPS-150
Capacity	tons	8	15	20	25	30	40	50	80	100	150
Diameter of Pressing Head	inch	1 1/2	1 1/2	1 1/2	1 1/2	2	2	2	2	2	2
Standard Stroke	mm	50	60	70	70	100	100	110	125	150	150
Stroke Per Minute	spm	170	95/120	85/120	85	55	50	50	45	45	40
Die Height	mm	180	210	230	250	260	310	330	300	350	360
Ram. Adjustment	mm	30	70	70	70	80	80	80	100	100	100
Ram. Area	sqmm	120 x 130	150 x 150	160 x 160	160 x 160	220 x 220	350 x 220	350 x 220	350 x 220	420 x 370	560 x 360
Table Area	sqmm	440 x 240	470 x 270	500 x 300	600 x 300	700 x 350	750 x 400	800 x 450	900 x 500	950 x 520	1100 x 600
Thickness of Bolster Plate	mm	45	55	60	60	70	75	80	90	100	100
Hole od Bed	Ømm	135	150	150	150	180	200	200	230	230	250
Motor Required	HP x P	1 x 4	1 x 4 2 x 6	2 x 4 2 x 6	2 x 4	3 x 4	5 x 4	5 x 4	7.5 x 4	10 x 4	15 x 4

Air Clutch Type		CAWS-20	CAWSH-30	CAGSH-40	CAGSH-50	CAGSH-100	CAGSH-160	CAGSH-200	MAGSH-160	NAGSH-200	IAGSH-60
Capacity	tons	20	30	40	50	100	160	200	160	200	60
Rated Tanng Point	mm	-	-	-	-	-	8	8	8	8	-
Diameter of Pressing Head	inch	1 1/2	2	2	2	2	2	2	2	2	2
Standard Stroke	mm	60	60	100	100	150	150	150	150	150	120
Stroke Per Minute	spm	150	150/250	70	60	50	50	50	50	50	70
Die Height	mm	260	250	210	300	350	450	450	350	350	280
Ram. Adjustment	mm	70	50	50	60	70	100	100	70	70	60
Ram. Area	R.L x F.B sqmm	240 x 320	300 x 420	300 x 420	300 x 420	350 x 460	550 x 550	550 x 550	710 x 750	710 x 750	350 x 470
Table Area	sqmm	300 x 600	420 x 700	420 x 700	450 x 800	520 x 950	660 x 1200	660 x 1200	900 x 800	900 x 800	500 x 900
Motor Required	HP x P	5 x 6	VS7.5 x 4	VS5 x 4	VS7.5 x 4	VS10 x 4	15 x 4	20 x 4	15 x 4	20 x 4	7.5 x 4