


CNC MULTIPLE AXES HYDRAULIC GUILLOTINE SHEAR

YCS-H series



YCS-HM TYPE

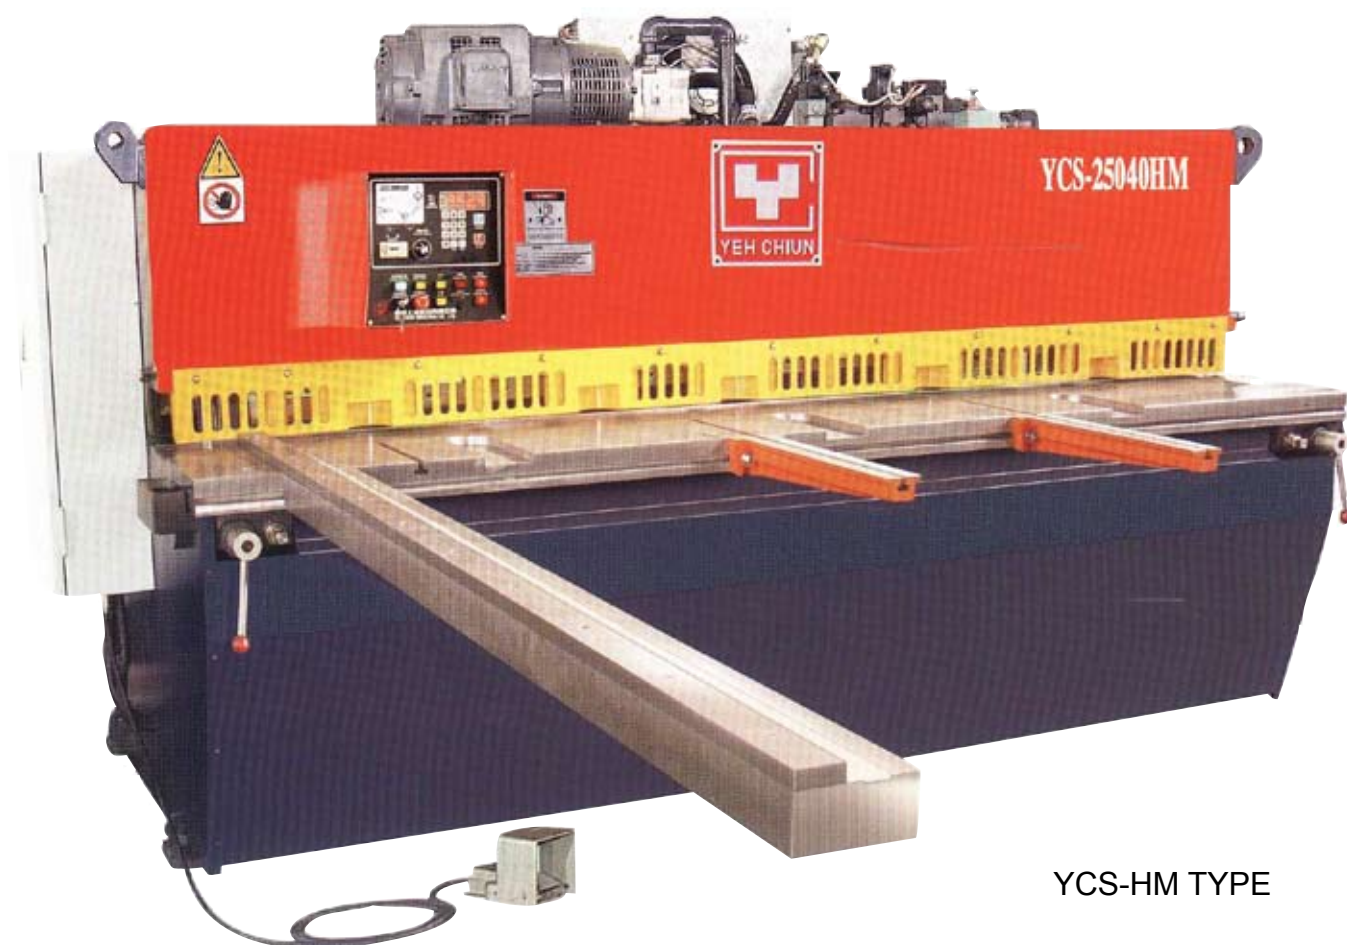

Specification

Model	Shearing Length (mm)	Max. Thickness (SS41) (mm)	Stainless Steel Thickness (SUS304) (mm)	Throat (mm)	Max. Angle (SS41)	Minimum Angle	Shear /Min	Backguage Stroke (HP)	Main Motor (HP)	Backguage Servo Motor (HP)	Gross Weight (tons)	A Length (mm)	B Width (mm)	C Hright (mm)
YCS-15040H	1500	4.0	2.5	100	1°75'	1°	40	800	10	1/2	4.5	2300	2100	2000
YCS-20040H	2000				1°75'		35		10	1/2	5.2	2900	2100	2000
YCS-25040H	2500				1°75'		35		10	1/2	6.0	3300	2100	2000
YCS-31040H	3100				1°75'		30		15	1/2	4.2	4200	2100	2000
YCS-41040H	4100				1°75'		25		15	1/2	10	5200	2200	2200
YCS-61040H	6100				1°75'		15		20	1	16	7300	2300	2300
YCS-15060H	1500	6.0	4.0	100	1°75'	1°	40	800	15	1/2	5.5	2300	2200	2000
YCS-20060H	2000				1°75'		35		15	1/2	6.8	2900	2200	2150
YCS-25060H	2500				1°75'		35		15	1/2	7.2	3600	2200	2150
YCS-31060H	3100				1°75'		30		20	1/2	8.2	4200	2200	2150
YCS-41060H	4100				1°75'		25		25	1/2	12.5	5200	2300	2300
YCS-61060H	6100				1°75'		15		30	1	18.8	7200	2300	2400
YCS-25080H	2500	8.0	5.0	100	2°	1°	35	800	25	1/2	8.5	3700	2250	2300
YCS-31080H	3100				2°		30		25	1/2	10	4300	2250	2300
YCS-41080H	4100				2°		25		30	1	15.5	5300	2300	2400
YCS-61080H	6100				2°		15		40	1	23.5	8300	2300	2500
YCS-250100H	2500	10.0	6.5	100	2°	1°	24	800	30	1	11.2	3700	2300	2800
YCS-310100H	3100				2°		23		30	1	13.5	4300	2300	2800
YCS-410100H	4100				2°		20		40	1	18	5300	2300	2800
YCS-610100H	6100				2°		15		50	1	28	7300	2400	2800
YCS-250130H	2500	13	8.0	100	2°	1°	25	800	40	1	12.5	3900	2350	2800
YCS-310130H	3100				2°		23		40	1	14.8	4500	2350	2800
YCS-410130H	4100				2°		20		50	1	21.5	5500	2350	2800
YCS-610130H	6100				2°		15		75	1	31.5	7500	2400	2800